

SPACERS

Triangular structure formed by three deformed wires, connected by welding a smooth zig-zag shaped wire every 8 inches.

APPLICATIONS

- ▶ Provide support for reinforcement in.. concrete structural elements.
- ▶ For both vertical and horizontal elements.



FEATURES

- ▶ Top wires of 5mm, bottom and zig-zag wires of 3.5-4mm.
- ▶ Standard length of 8 ft.
- ▶ Different length upon request.
- ▶ Bundle of 120 piece.
- ▶ Height from 3 to 12 inches.

BENEFITS

- ▶ Guarantees position and separation between reinforcement.
- ▶ Accelerates construction time.
- ▶ Reduces on-site labor cost and time.
- ▶ Rigid and tight reinforcement
- ▶ Provide stability through the pouring of concrete.


Height	Top wire diameter	Bottom wire diameter	Zig-zag wire diameter
in	mm	mm	mm
3	5.0	3.5	3.5
4	5.0	3.5	3.5
5	5.0	3.5	3.5
6	5.0	3.5	3.5
7	5.0	4.0	4.0
8	5.0	4.0	4.0
9	5.0	4.0	4.0
10	5.0	4.0	4.0
11	5.0	4.0	4.0
12	5.0	4.0	4.0

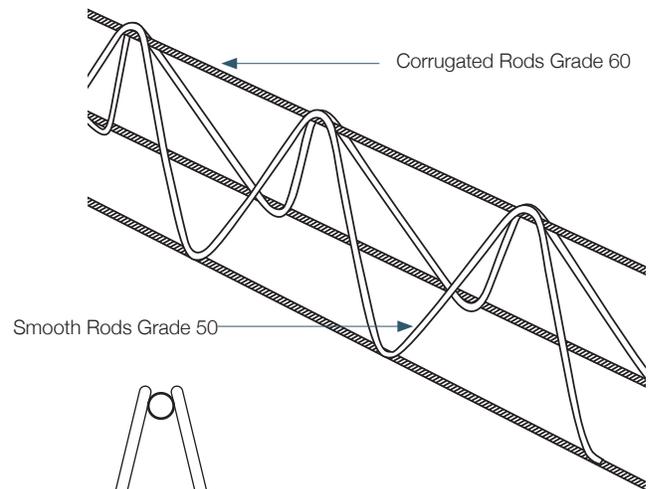

8 cm opening

PRESENTATION:

- ▶ Length: 20 feet
- ▶ Bundle: 50 sheets

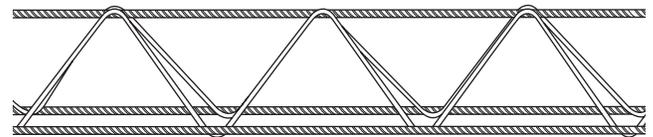

Separation every 20 cm

MANUFACTURING STANDARDS: ACI 318

To buy this product write to us at: sales@ingetek.us
www.ingetek.us