

# Environmental Product Declaration

Steel wire rod manufactured from steel scrap

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021



**Programme:**

The International EPD® System  
EPD registered through the fully  
aligned regional programme/  
hub: Latin American Hub,  
[www.epd-latinamerica.com](http://www.epd-latinamerica.com)  
[info@environdec.com](mailto:info@environdec.com)  
EPD® Latin America

**Programme operator:**

EPD International AB

**Regional Hub:**

Latin American Hub of  
the International  
EPD® System

**EPD registration  
number:**

EPD-IES-0001236:001  
(S-P-01236)

**Revision date:**

2024-10-15  
(version 001)

**Validity date:**

2029-10-15

**Publication date:**

2018-11-08

**Geographical scope:**

Mexico



*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*



# Content



**1.** DEACERO

**2.** General Information

**3.** The Product

**4.** Content declaration

**5.** Distribution packaging

**6.** Biogenic Carbon Content Information

**7.** LCA Rules

**8.** Environmental performance


**9.** Differences between EDP versions

**10.** Verification and registration

**11.** Certifications

**12.** Contact information

**13.** References

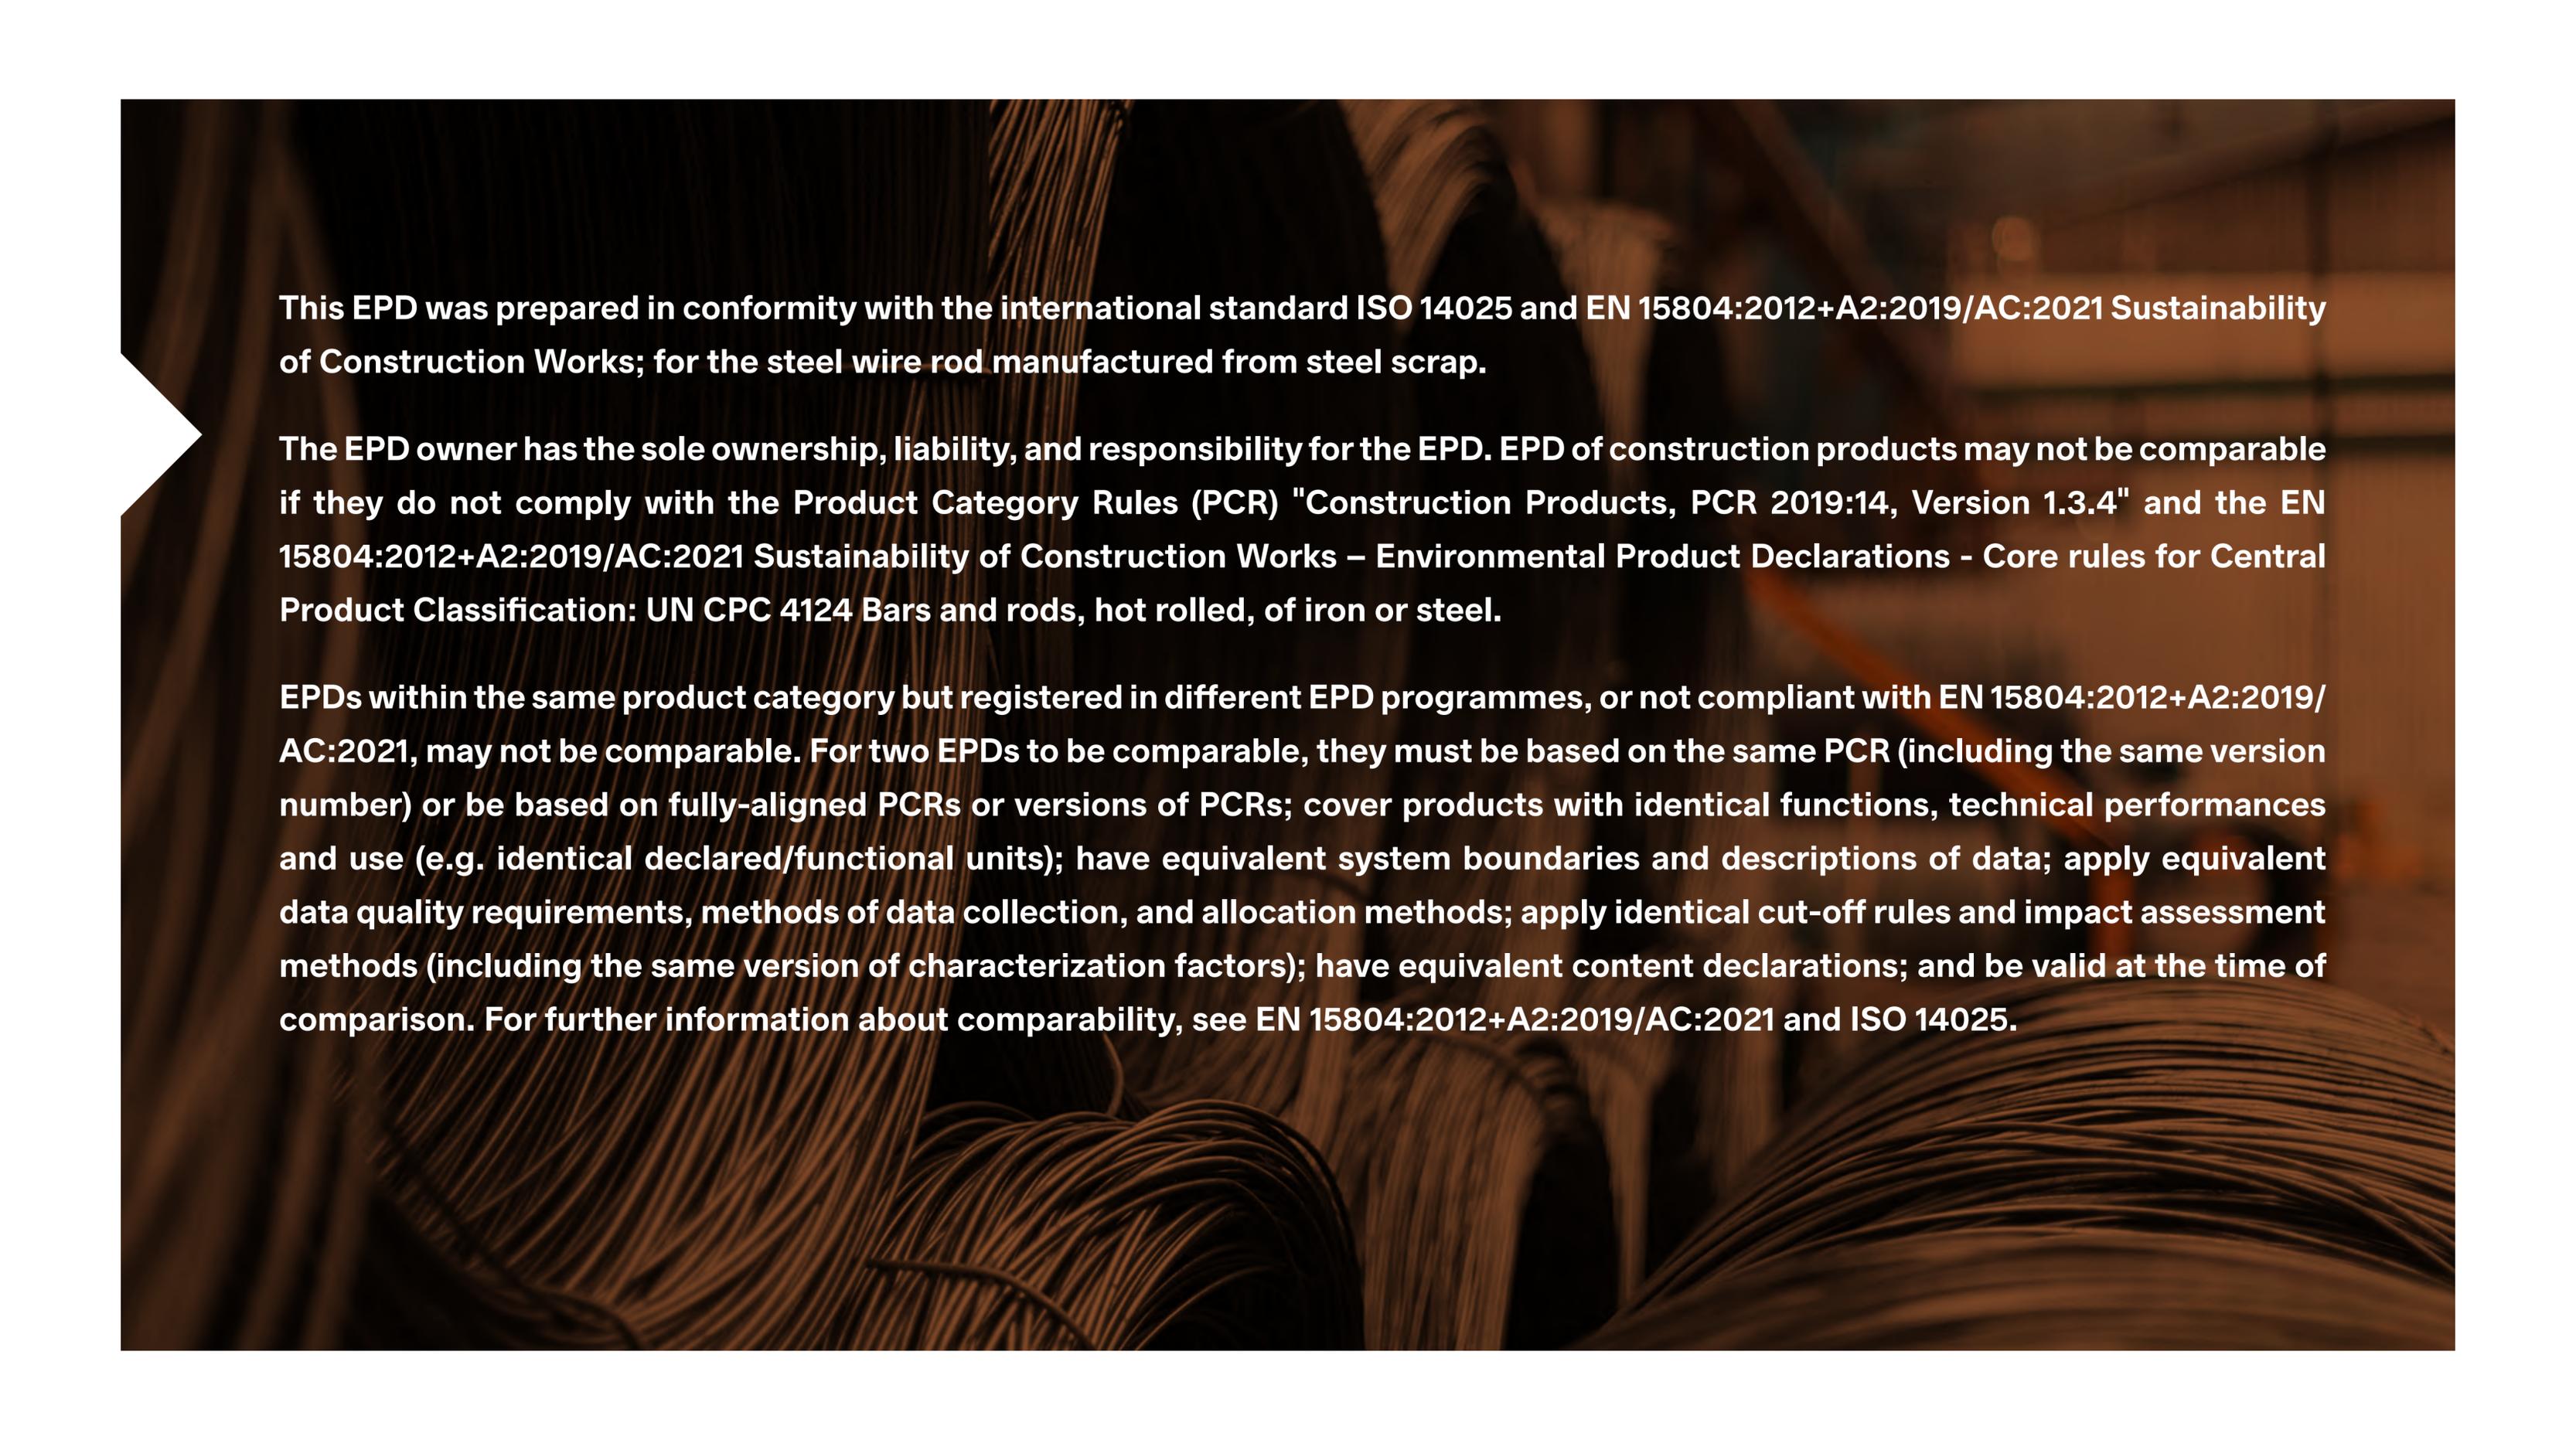

**This EPD was prepared in conformity with the international standard ISO 14025 and EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works; for the steel wire rod manufactured from steel scrap.**

**The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPD of construction products may not be comparable if they do not comply with the Product Category Rules (PCR) "Construction Products, PCR 2019:14, Version 1.3.4" and the EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works – Environmental Product Declarations - Core rules for Central Product Classification: UN CPC 4124 Bars and rods, hot rolled, of iron or steel.**

**EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804:2012+A2:2019/AC:2021, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804:2012+A2:2019/AC:2021 and ISO 14025.**


# 1. DEACERO

DEACERO S.A.P.I. de C.V. is a 100% Mexican company, founded in 1952 with the vision of becoming the most attractive producer of steel and its derivatives in the steel industry. With over 70 years of experience, a global presence, and strategic locations in Latin America and North America, they have consolidated their production and commercialization of long steels, reinforcing steels, wires, wire rods, and construction systems for various industries, notably agriculture, energy, manufacturing, and construction.

They are distinguished by their strong commitment to sustainability and social responsibility, implementing advanced recycling practices. They recover and recycle 97% of the scrap metal used in their process to reduce their environmental footprint and promote a cleaner production cycle. They produce steel and wire from scrap or recycled steel in electric arc furnaces (EAF), which generate nearly four times less CO<sub>2</sub> emissions than the basic oxygen furnace (BOF) method. This approach allows them to reduce the consumption of natural resources and minimize carbon emissions.

Their innovation and commitment to sustainability have led them to integrate practices with a lower environmental impact in all their processes, remaining in constant evolution. DEACERO has an Environmental Management System Implementation Plan with the goal of obtaining ISO 14001:2015 certification at their steel mills in Coahuila and Guanajuato, as well as at the wire plants located in the State of Mexico, Guanajuato, and Nuevo León by the end of 2024.

Since 2022, DEACERO S.A.P.I. de C.V. has been committed to the United Nations Global Compact corporate responsibility initiative and its principles in the areas of human rights, labor, environment, and anti-corruption.

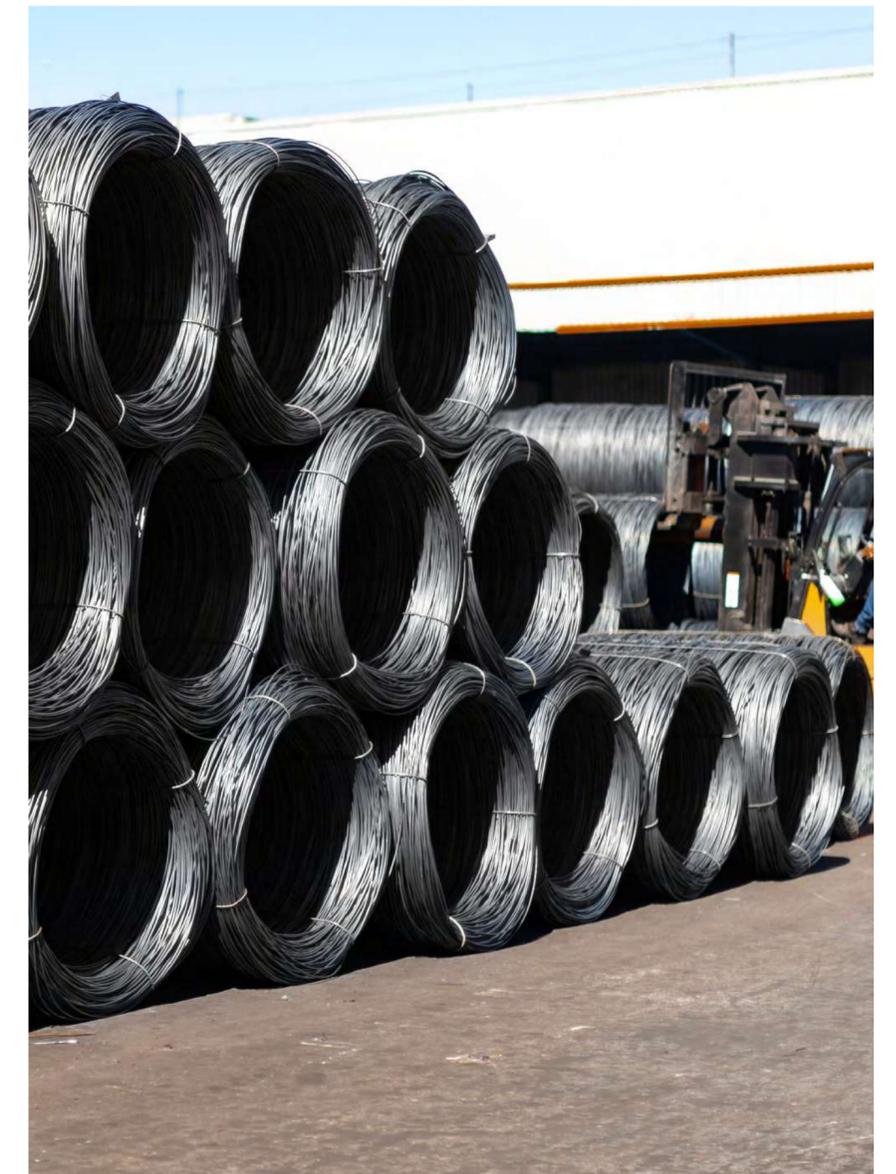

# 2. General information



PRODUCT:	STEEL WIRE ROD
Name of the manufacturer:	DEACERO S.A.P.I. de C.V.
Description of the construction product:	Steel wire rod is manufactured from steel scrap. The product is mainly used for the construction of structural elements.
Declared unit:	1000 kg of Steel wire rod manufactured from steel scrap.
Description of the main product components and or materials:	Steel manufactured using scrap steel as source of iron.
Life cycle stages not considered:	The modules: A4, A5, B1, B2, B3, B4, B5, B6, B7.
Statement content:	<p>This environmental product declaration is based on information modules that do not cover aspects of construction stage and use. It contains detailed information on the stage of input materials used for the generation of raw material and central process, modules A1, A2, A3, approximations of scenarios C1, C2, C3, C4 and D based on national statistics.</p> <ul style="list-style-type: none"> <li>• Definition of the product.</li> <li>• Content declaration.</li> <li>• Declared unit.</li> <li>• System boundary.</li> <li>• Environmental performance.</li> <li>• Evidence and verifications.</li> </ul>
Comparability of EPD of construction products	<p>a. EPD of construction products may not be comparable if they do not comply with EN15804:2012+A2:2019/AC:2021.</p> <p>b. Environmental product declarations within the same product category from different programs may not be comparable</p>
For more information consult	<a href="http://www.deacero.com">www.deacero.com</a>
Sites for which this EPD is representative	<p>Manufacturing Plant</p> <p>Acería Celaya: Carretera 45 Panamericana, Tramo Celaya-Salamanca Km 64.8, El Chinaco, Villagrán, Guanajuato</p> <p>Acería Saltillo: Carretera. Mty - Saltillo KM. 8.5 Ramos Arizpe, Coahuila CP 25000</p>
Intended Public:	B2B (Business to Business)

# 2. General information




ACCOUNTABILITIES FOR PCR, LCA AND INDEPENDENT, THIRD-PARTY VERIFICATION	
Product Category Rules (PCR)	
CEN standard EN 15804 serve as the core Product Category Rules (PCR)	
Product category rules (PCR): PCR 2019:14 Construction products, version 1.3.4	
PCR review was conducted by: The Technical Committee of the International EPD System. See <a href="http://www.environdec.com">www.environdec.com</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .	
LIFE CYCLE ASSESSMENT (LCA)	
LCA accountability:	René García, Mireya González, Center for Life Cycle Assessment and Sustainable Design – CADIS.
THIRD-PARTY VERIFICATION	
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:	
<input checked="" type="checkbox"/> EPD verification by individual verifier Third-party verifier: Rubén Carnerero Acosta, IK Ingeniería SL.	
Approved by: The International EPD System	
Procedure for follow-up of data during EPD validity involves third-party verifier	
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

# 3. The products

## Steel wire rod

The wire rod produced by DEACERO is used in the construction industry to form reinforcing steel figures. DEACERO produces the wire rod following the ASTM-A-510 manufacturing standard. Some of the characteristics of the product are:

Both families fully comply with the standards: ASTM A36 and ASTM 529-50, and have the following characteristics:



- Hot rolled steel
- Diameters 6.35 - 6.5 (1/4 inch)
- Presentations with secure straps
- High quality surface

The tensile mechanical properties are shown in Table 1.

<b>Tensile strength</b>	60 kg/mm <sup>2</sup>
<b>Yield stress</b>	2300 kg/cm <sup>2</sup>

Table 1. Mechanical properties of steel wire rod.

Wire rod is used in structures, manufacturing stirrups, enabling steel and reinforcing steel. Likewise, the wire rod manufactured in DEACERO has 4 ties distributed in equidistant points and has a high resistance to tension.



Figure 1. Steel wire rod manufactured by DEACERO.

# 4. Content declaration



Below is a summary table with the product contents and the breakdown of the identification of the contained chemical substances and their hazardousness. The raw material for the steel wire rod is the billet; therefore, the table presented below shows the substance content of this input.

Product components	Weight, kg	Post-consumer recycled material, weight-% of product	CAS Number	Biogenic material, weight-% of product	Biogenic material, kg C/product or declared unit
Scrap steel*	90	>90%	Not applicable	0	0
Pig iron	3	0%	Not applicable	0	0
Limestone	1.5	0%	471-34-1	0	0
Oxygen	4	0%	7782-44-7	0	0
Others	1	0%	Not applicable	0	0

\*Steel manufactured in the Industrial Center of DEACERO uses 100% steel scrap as source of iron.

1 kg of biogenic carbon is equivalent to 44/12 kg of CO<sub>2</sub>

Table 2. Content product of the materials.

## 5. DISTRIBUTION PACKAGING

Packaging: The product doesn't have distribution packaging.

## 6. BIOGENIC CARBON CONTENT INFORMATION

Only the product reports biogenic carbon content since in the packaging the inputs that could account for impact represent less than 5% of the total weight of the packaging therefore, following those described in the RCP "Annex 2: Guidelines for the calculation of biogenic GWP" (PCR Construction Products, 2024) is not declared. Details of the biogenic carbon content are presented later in this paper.

# 7. LCA Rules



Environmental potential impacts were calculated in conformity to EN15804:2012+A2:2019/AC:2021 sustainability of construction works and PCR 2019:14 Construction products Version 1.3.4, UN CPC 4124 bars and rods, hot rolled, of iron or steel. This EPD is in accordance with ISO 14025:2006.

Environmental potential impacts were calculated through Life Cycle Assessment (LCA) methodology conformity to ISO 14040:2006 and ISO 14044:2006. An external third-party verification process of the EPD was conducted according to General Programme Instructions for the International EPD® System Version 4.0<sup>1</sup>. Verification includes a documental review and a validation of both the underlying LCA study and documents describing additional environmental information that justify data provided in the EPD<sup>2</sup>.

## 7.1 Declared unit

**1000 kg of steel wire rod produced from billets that use ferrous scrap as raw material, manufactured during the year 2022 by DEACERO in the Acería Saltillo and Acería Celaya plants, used by the construction industry as reinforcement for concrete structures.**

## 7.2 System boundary

The potential environmental impacts were calculated through Life Cycle Assessment (LCA) methodology of steel wire rod to ISO 14040:2006 and ISO 14044:2006. This study went through a critical review process in accordance with ISO / TS 14071: 2014.

According to EN 15804:2012+A2:2019/AC:2021 section 5.2 the following type of EPD is “cradle to gate with modules C1-C4 and module D (A1-A3 +C+D). This EPD is based on information upstream processes and core processes, modules A1 to A3, and approximations of scenarios C1, C2, C3, C4, and D based on construction sector statistics in Mexico (see Table 4). Does not include A4-A5 Construction stage and B Usage stage.

Life cycle stage	Information about the modules contained in the stages	EPD			
		Cradle-to-gate with modules C1-C4 and module D	Cradle-to-gate with modules C1-C4, module D and optional modules	From cradle to grave and module D	EPD construction services: Cradle to door with modules A1-A5 and optional modules
A1-A3 products stage	A1) Raw material procurement	Mandatory	Mandatory	Mandatory	Mandatory
	A2) Transport				
	A3) Manufacture				
A4-A5 Construction stage	A4) Transport	-	Optional for goods	Mandatory	Mandatory
	A5) Construction / installation		Required for services		
B Usage stage	B1) Use	-	Optional	Mandatory	Mandatory
	B2) Maintenance				
	B3) Reparation				
	B4) Replacement				
	B5) Remodeling				
	B6) Operational energy use				
	B7) Operational water use				
C End of life stage	C1) Deconstruction, demolition	Mandatory	Mandatory	Mandatory	Optional
	C2) Transport				
	C3) Waste processing				
	C4) Final disposition				
D Benefits and charges beyond the system limit	D) Reuse, recycling or energy recovery potential.	Mandatory	Mandatory	Mandatory	-

**i** Table 3. System boundaries.

1. The “EN 15804 reference package” based on the Environmental Footprint (EF) 3.1 normalization and weighting values version has been used.  
 2. “The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.”

# 7. LCA Rules

Description of the modules included in this DAP.

Module	Product stage			Construction process phase		Usage stage						End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction facility	Use	Maintenance	Repair	Restoration	Operational energy use	Operational use of water	Demolition/Deconstruction	Transport	Waste processing	Disposal	Reuse – Recovery – Recycling - potential
Module	A1	A2	A3	A4	A5	B1	B2	B4	B5	B6	B7	C1	C2	C3	C4	D
<b>Declared modules</b>	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
<b>Geography</b>	MX	MX	MX	ND	ND	ND	ND	ND	ND	ND	ND	MX	MX	MX	MX	MX
<b>Specific data used</b>	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Product variation</b>	0%			-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Site variation</b>	<10%1			-	-	-	-	-	-	-	-	-	-	-	-	-

X = Declared module; ND = No declared module; MX= México

Note. Infrastructure and capital goods are excluded for this evaluation, in upstream, core and downstream processes.

Direct data obtained from DEACERO records corresponds to the technology used in the steel beam production process. Data collection was carried out directly from Acería Ramos. Information managed in an internal system and specialized software of CENACE (Centro Nacional de Control de Energía) consumption logs (meters) and invoices with municipal systems and waste generation logs.

## 7.3. Description of information modules.

Description of information modules included in this EPD.

A1) RAW MATERIALS SUPPLY	A2) TRANSPORTATION	A3) MANUFACTURING	C) END OF LIFE	D) BENEFITS AND CHARGES BEYOND THE SYSTEM LIMIT
				
<ul style="list-style-type: none"> <li>Consumption and production of raw materials.</li> <li>Consumption and production of electrical energy.</li> </ul>	<ul style="list-style-type: none"> <li>Transport distance of raw materials and supplies to the manufacturing site.</li> <li>Fuel consumption and emissions related to transportation requirements.</li> <li>Transportation distance for waste disposal and treatment.</li> </ul>	<ul style="list-style-type: none"> <li>Consumption and production of water.</li> <li>Air emissions.</li> <li>Waste generation.</li> <li>Waste treatment processes, consumption of related materials and energy.</li> </ul>	<ul style="list-style-type: none"> <li>Deconstruction</li> <li>Transport final destination.</li> <li>What can be recycled.</li> <li>What goes to fill what is wasted and not recycled.</li> </ul>	<ul style="list-style-type: none"> <li>The avoided loads, benefits of stopping the production of the billet.</li> </ul>

**i** Table 4. Description of modules included in this EPD

# 7. LCA Rules

## 7.4 Description of the manufacturing process

The manufacturing process is described in Figure 2 and Figure 3.

INPUTS USE:

- Raw material.
- Electric power
- Diesel
- Natural gas
- Gas LP
- Water

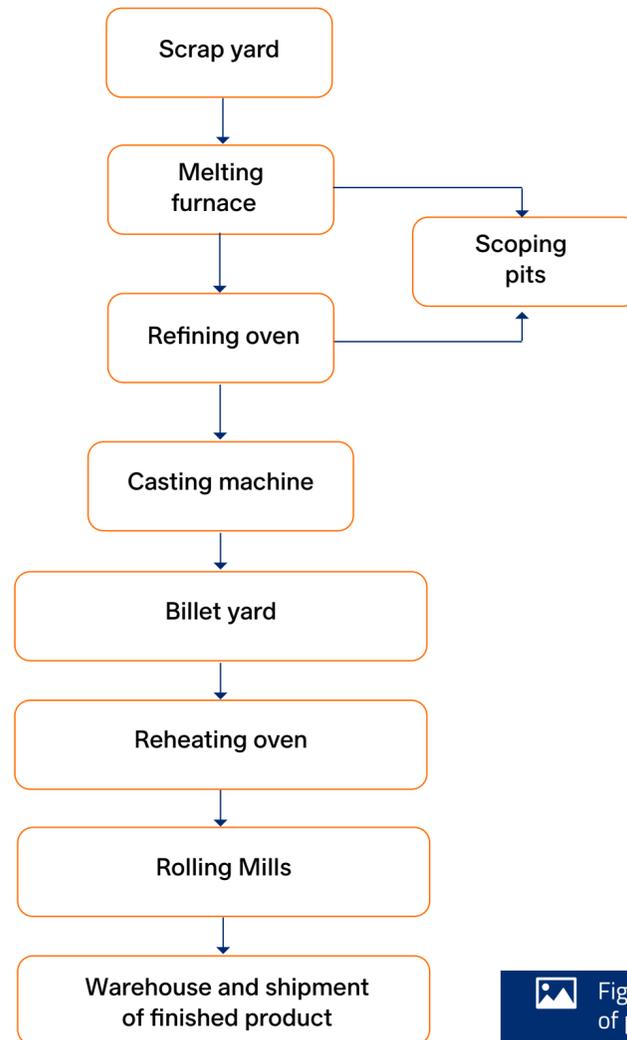


Figure 2. Celaya Steel factory. Diagram of process.

INPUTS USE:

- Raw material.
- Electric power
- Diesel
- Natural gas
- Gas LP
- Water

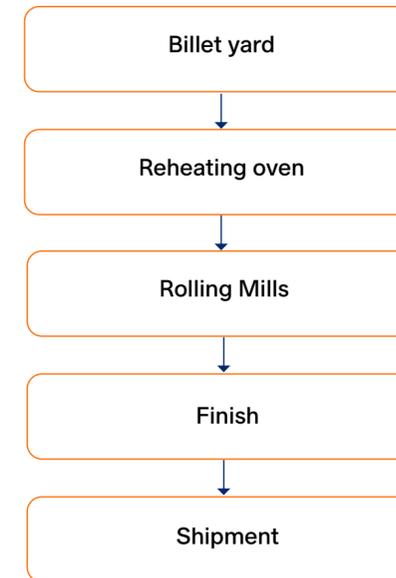


Figure 3. Saltillo Steel factory. Diagram of process.

# 7. LCA Rules



## 7.5 Assumptions

The assumptions related to the steel wire rod manufacturing process are presented below.

- The scenarios and distances associated with modules C1) Deconstruction - demolition, C2) Transport, C3) Waste processing, C4) Disposal and D) Potential for reuse, recycling or energy recovery in the future.
- According to the Latin American Steel Association (ALACERO, 2022), in Mexico, 98% of the steel generated during the demolition of construction buildings is recycled, and only 2% reaches the landfill.
- On the other hand, according to Javeriana University (Pontificia Universidad Javeriana, Faculty of Engineering, 2014) the fuel consumption involved during the demolition of buildings corresponds to 84 liters for the use of a backhoe, 111 liters for the use of a backhoe loader, 98 liters for the use of a mobile crusher. In this same process, the emissions of particulate matter associated with the demolition were obtained from Ecoinvent 3.9.1 “Steel and iron (waste treatment) {GLO}| recycling of steel and iron | Cut-off, U”.

## 7.6. Cut-off criteria

All flows of fuel, energy, materials and supplies necessary to produce the steel wire rod have been considered; materials that could be used in preventive or corrective maintenance of machinery and equipment were disregarded, as well as the use of uniforms and personal protective equipment or other auxiliary materials, leaving out textile impregnated with oils or plastics and the final disposal of these as hazardous waste.

## 7.7. Allocation

The production process of DEACERO steel wire rod begins with obtaining scrap and processing it in the scrap yard to obtain billet, which is the raw material for the products.

The product is produced in the DEACERO Saltillo and Celaya plants.

The following tables present the allocation of by-products in the ICV, for each product.

Byproduct	Quantity	Unit	Allocation
Allocation by yield	2.32E-02	Ton	2.26%
Steel wire rod	1.00E+00	Ton	97.25%
Zinc	5.11E-03	Ton	0.50%

**i** Table 5. Allocation of by-products in the ICV of steel wire rod.

## 7.8. Time representativeness

Direct data obtained from DEACERO is representative for 2022.

# 8. Environmental performance



SimaPro 9.5 and Ecoinvent 3.9.1 were used for Life Cycle Impact Assessment.

## 8.1 Potential environmental impact

All information modules are reported and valued separately. However, the present EPD presents itself the total impact across all stage.

As can be seen in the next graph the greatest environmental impacts are generated by stage A1 for obtaining raw materials, followed by stage A3 manufacturing, while the lowest environmental contributions are generated by stage A2 transportation.

In fact, practically all the basic and additional categories show a similar trend in materials. In the case of A1, the greatest environmental impacts are generated by the billet. On the one hand, the billet is a raw material that is obtained and transformed within the same DEACERO plants and requires different raw materials and auxiliary energy inputs that have an impact on practically all categories.

On the other hand, electricity has impacts associated with its generation and distribution in our country, within these activities different greenhouse gases are emitted that directly impact categories such as climate change, ozone layer depletion and photochemical ozone formation.

### Electricity impact

The steel wire rod manufactured by DEACERO uses electricity generated in three different power plants. The combined cycle power plants are "El Carmen" and "Tamazunchale," and the electricity high voltage mexican grid.

As part of the requirements of the PCR, the climate impact as kg CO<sub>2</sub> eq/kWh of the electricity used in the manufacturing process of steel wire rod, is reported in the next table. This impact was calculated using the GWP-GHG indicator.

Impact Basic Category	Unit	Quantity
Global warming potential (GWP-GHG)	kg CO <sub>2</sub> eq./kwh	3.86E-01

**i** Table 6. Electricity climate impact per kwh.


### Scrap use climate impact

Another specific topic in accordance with the new requirements of the PCR is the report of the climate impact of the scrap inputs. These impacts were calculated using the GWP-GHG indicator.

Impact Basic Category	Unit	Quantity
Global warming potential (GWP-GHG)	kg CO <sub>2</sub> eq./ton	6.65E-02

**i** Table 7. Scrap use, climate impact

# 8. Environmental performance

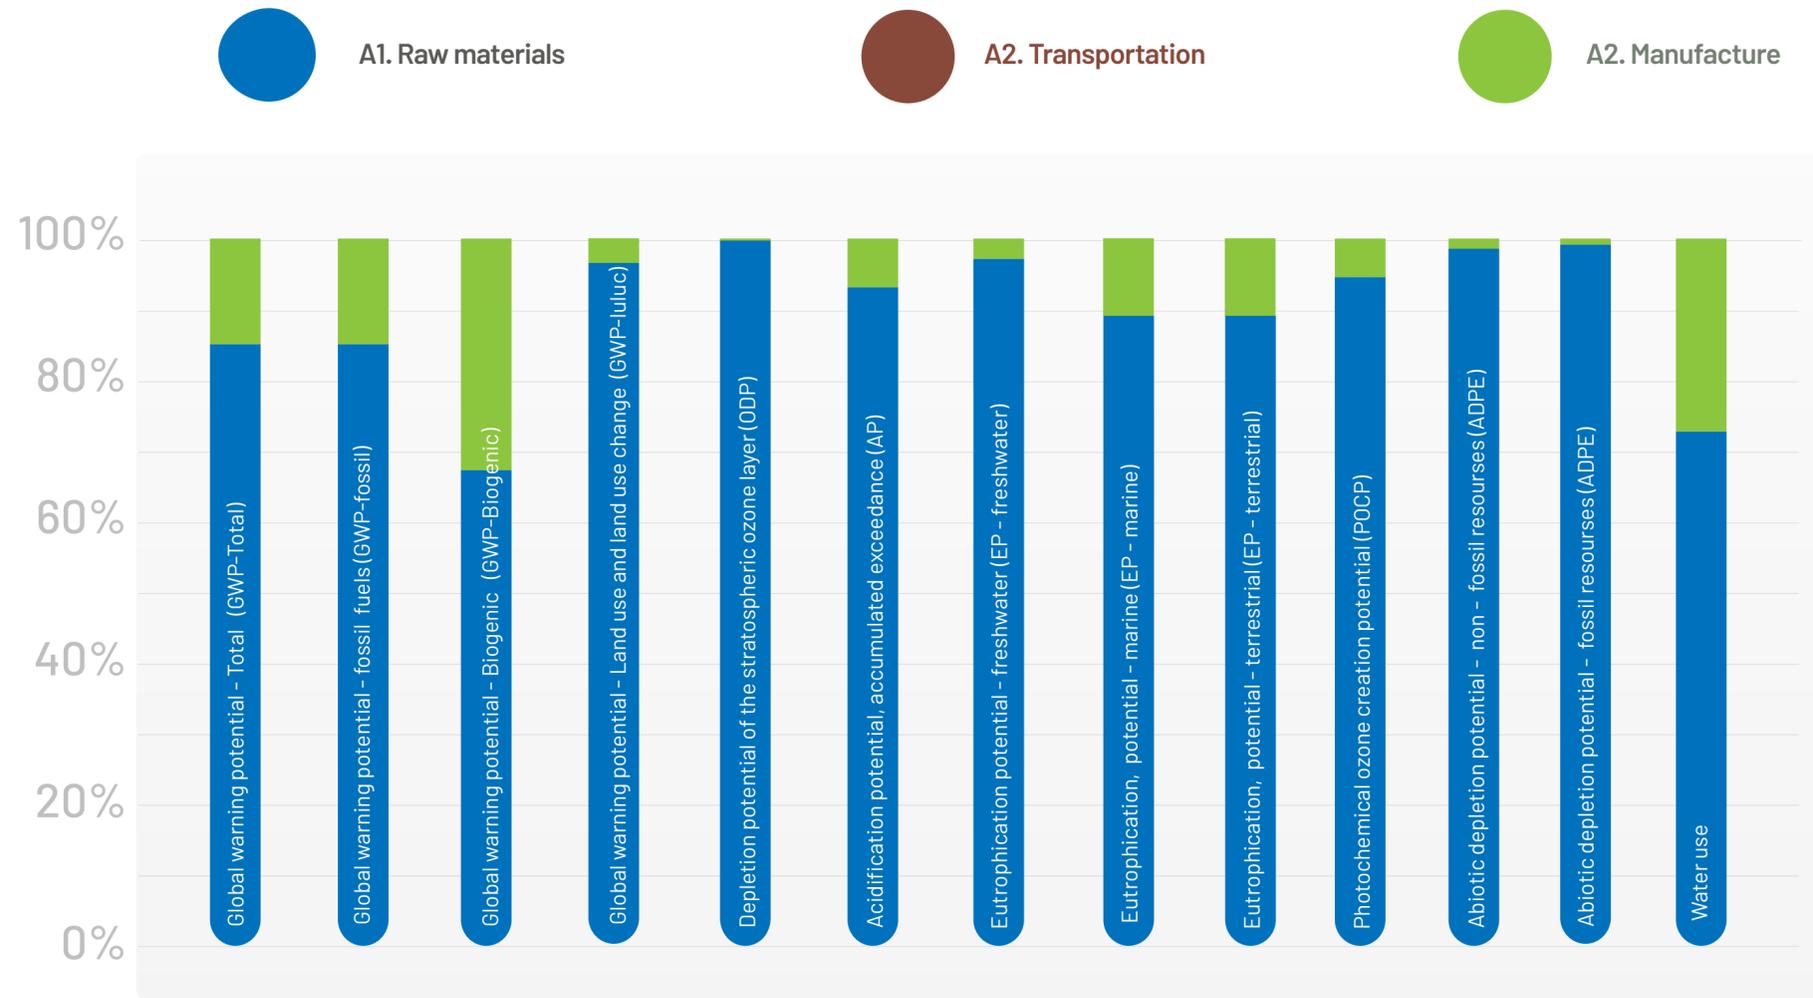

Graph 1. A1-A3 Basic impact categories results

# 8. Environmental performance



Indicators describing resource use	Unit	Total A1 – A3	C1) Deconstruction	C2) Waste transport	C3) Waste treatment	C4) Waste disposal	D) Benefits and charges beyond the system boundary
Global warming potential - fossil fuels (GWP-fossil)	kg CO <sub>2</sub> eq.	4.41E+02	2.68E+00	1.91E+01	0.00E+00	6.68E+00	-3.62E+01
Global warming potential - biogenic (GWP-biogenic)	kg CO <sub>2</sub> eq.	1.09E-01	3.76E-09	1.75E-07	9.69E-03	2.12E-07	9.53E-01
Global warming potential - land use and land use change (GWP-luluc)	kg CO <sub>2</sub> eq.	2.15E-01	1.10E-04	7.52E-04	0.00E+00	1.92E-03	5.46E-02
Global warming potential - total (GWP-total)	kg CO <sub>2</sub> eq.	4.42E+02	2.68E+00	1.91E+01	9.69E-03	6.69E+00	-3.51E+01
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC-11 eq.	1.24E-05	4.23E-08	2.89E-07	0.00E+00	2.26E-08	-2.21E-06
Acidification potential, accumulated exceedance (AP)	mol H+ eq.	7.72E-01	2.57E-02	3.09E-02	0.00E+00	2.02E-02	-4.51E-02
Eutrophication potential - freshwater (EP-freshwater)	kg P eq.	5.54E-03	2.29E-06	4.58E-05	0.00E+00	8.03E-05	1.03E-02
Eutrophication potential - marine (EP-marine)	kg N eq.	2.09E-01	1.20E-02	7.18E-03	0.00E+00	5.97E-03	3.20E-03
Eutrophication potential - terrestrial (EP-terrestrial)	mol N eq.	2.29E+00	1.31E-01	7.18E-02	0.00E+00	6.76E-02	-3.12E-01
Photochemical ozone creation potential (POCP)	kg NMVOC eq.	1.23E+00	3.86E-02	4.42E-02	0.00E+00	1.86E-02	-3.32E-01
Abiotic depletion potential - non-fossil resources (ADPE)	kg Sb eq.	1.31E-04	1.13E-07	1.17E-06	0.00E+00	1.05E-05	1.58E-04
Abiotic depletion potential - fossil resources (ADPF)	MJ, net calorific value	6.76E+03	3.53E+01	2.64E+02	0.00E+00	3.24E+01	-2.32E+02
Water (user) deprivation potential (WDP)	m3 world eq. deprived	1.16E+02	4.52E-02	3.66E-01	0.00E+00	3.15E-01	-1.24E+02

Table 8. A1-A3 Basic impact categories results.

# 8. Environmental performance



## 8.2. Use of resources

Parameters describing resource use were evaluated with the Cumulated Energy Demand method version 1.09 (Frischknecht et al. 2007) except for the indicator of use of net fresh water that was evaluated with Recipe 2016 Midpoint (H) version 1.00.

According to the EN15804:2012+A2:2019/AC:2021 standard, "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products," and Annex 3 of Product Category Rule 1.3.4 "Guidance for the calculation of primary energy use indicators," considering scenario B outlined in the annex, the results of the environmental indicators evaluation describing resource use and others describing material and energy balance flows for modules A1-A3, C1-C4, and D are presented. A detailed description of the use of resources is provided in **Table 10**.

Indicators describing resource use	Unit	A1-A3	C1	C2	C3	C4	D
Use of renewable primary energy as energy carrier (PERE)	MJ, net calorific value	4.44E+02	6.87E-02	3.89E-01	4.68E-01	7.49E-01	5.21E+01
Use of renewable primary energy resources used as raw materials (PERM)	MJ, net calorific value	3.31E+00	0.00E+00	0.00E+00	-4.68E-01	5.63E-01	0.00E+00
Total use of renewable primary energy (PERT)	MJ, net calorific value	4.47E+02	6.87E-02	3.89E-01	0.00E+00	1.31E+00	5.21E+01
Use of non renewable primary energy as energy carrier (PENRE)	MJ, net calorific value	7.37E+03	3.75E+01	2.80E+02	1.12E+01	2.09E+01	-2.36E+02
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ, net calorific value	5.50E+01	0.00E+00	0.00E+00	-1.12E+01	1.35E+01	0.00E+00
Total use of non renewable primary energy resource (PENRT)	MJ, net calorific value	7.43E+03	3.75E+01	2.80E+02	0.00E+00	3.44E+01	-2.36E+02
Use of secondary material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of renewable secondary fuels (RSF)	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of non-renewable secondary fuels (NRSF)	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net use of fresh water (FW)	m3	2.34E+00	4.52E-02	3.66E-01	0.00E+00	3.15E-01	-1.24E+02

Disclaimer discouraging the use of the results of modules A1-A3 without considering the results of module C.

 Table 9. Use of resources parameters.

# 8. Environmental performance



### 8.3. Other indicators describing waste categories

Environmental indicators describing waste generation were obtained from LCI except for background information which has been calculated using EDIP 2003 method. Environmental parameters describing waste generation are provided in **Table 11**.

Environmental information describing waste categories and output flows	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed (HWD)	kg	7.96E+01	2.36E-04	1.78E-03	0.00E+00	9.53E-05	-1.09E-02
Non-hazardous waste disposed (NHWD)	kg	5.75E+00	2.62E-03	6.73E-02	0.00E+00	4.00E+01	2.34E+01
Radioactive waste disposed (RWD)	kg	2.07E-03	1.72E-06	9.24E-06	0.00E+00	1.55E-05	8.38E-04
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MFR)	kg	1.00E+03	0.00E+00	0.00E+00	0.00E+00	9.80E+02	1.00E+03
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported electrical energy (EEE)	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported thermal energy (EET)	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**i** Table 10. Other indicators describe waste categories

### 8.4. Additional environmental information

Participation, alliances and badges.



DEACERO has an Environmental Management System Implementation Plan with the objective of obtaining ISO 14001:2015 certification in its steel mills located in Coahuila and Guanajuato, as well as in the wire plants located in the State of Mexico and Guanajuato and Nuevo León by the end of 2024.



Since 2022, DEACERO S.A.P.I. de C.V. has been committed to the corporate responsibility initiative of the United Nations Global Compact and its principles in the areas of human rights, labor, environment and anti-corruption.

\*No radioactive waste is produced during DEACERO operations.

\*\* The column "A3) Manufacturing direct and indirect, refers to direct data and background data regarding production of ancillary materials and other processes outside DEACERO's facilities".

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Note: For the interpretation of results, consider modules A1-A3 and C.

# 9. Differences between EPD versions

The previous version of this EPD named Steel Wire Rod and Steel Galvanized Wire manufactured from steel scrap was published on November 8, 2018, in accordance with PCR 2012:01 Construction products and construction services, Version 2.2 (2017-05-03).

This EPD was updated following EN 15804:2012+A2:2019/AC:2021 standard and Construction products PCR 2019:2014 V 1.3.4 (2024-04-30).

# 10. Verification and registration



## CEN STANDARD EN 15804 SERVED AS THE CORE PCR

Programme	 International EPD® System <a href="http://www.environdec.com">www.environdec.com</a>  EPD registered through the fully aligned regional programme/hub: EPD Latin America <a href="http://www.epdlatinamerica.com">www.epdlatinamerica.com</a>
Programme operator	<b>Programme operator EPD International AB</b> Box 210 60 SE-100 31 Stockholm, Sweden <b>EPD Latin America</b> Chile: Alonso de Ercilla 2996, Ñuñoa, Santiago Chile. Mexico: Bosques De Bohemia 2 No. 9, Bosques del Lago. Cuautitlan Izcalli, Estado de México, México.
EPD registration number:	EPD-IES-0001236:001 (S-P-01236)
Validity date:	2029-10-15
Revision date:	2024-10-15 (version 001)
Issue date:	2018-11-08
Reference year of data:	2022
Geographical scope:	Mexico
Production Plant:	Acería Saltillo and Acería Celaya
Central product classification:	UN CPC 4124 Bars and rods, hot rolled, of iron or steel
Product category rules:	PCR 2019:14 construction products, Version 1.3.4
PCR review was conducted by:	<u>Claudia A. Peña, University of Concepción, Chile.</u> <u>The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a>.</u>
Independent verification of the declaration data, according to ISO 14025:2006.	<input type="checkbox"/> EPD process certification (Internal) <input checked="" type="checkbox"/> EPD verification (External)
Third-party verifier:	Ruben Carnerero Acosta Approved EPD verifier
Approved by:	r.carnerero@ik-ingenieria.com The International EPD® System
Procedure for follow-up of data during EPD validity involves third-party verifier:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

# 11. Certifications



Since 2020, DEACERO has been re-recognized annually with the "Empresa Socialmente Responsable" Distinction awarded by the "Centro Mexicano de Filantropía" (CEMEFI). Since 2020.



DEACERO is evaluated annually on sustainability and social responsibility through EcoVadis, with the aim of aligning itself with ethical, sustainable and transparent practices in areas such as the environment, labor, human rights and business ethics.



DECAERO has had a Quality Management System certified under the international standard ISO 14001:2015 for its processes at Acería Celaya and Acería Ramos since 2021, and is currently in force.



Deacero has its testing laboratory located in Acería Celaya accredited in accordance with the requirements established in the standard, NMX-EC-17025-IMNC-2018 and ISO/IEC 17025:2017.

# 12. Contact information



## EPD OWNER

## LCA AUTOR

## PROGRAMME OPERATOR



DEACERO S.A.P.I. de C.V.  
Acería Ramos: Carretera  
Monclova Km. 4, Tramo Santa  
Cruz-Ojo Caliente #2125,  
Localidad El Mesón del Norte,  
Ramos Arizpe, del Estado de  
Coahuila, México. C.P. 25900

[www.deacero.com](http://www.deacero.com)

Contact person:  
María Laura Gutiérrez  
Sauceda – subdirectora de  
Sustentabilidad  
[sustentabilidad@deacero.com](mailto:sustentabilidad@deacero.com)

Centro de Analisis de Ciclo de  
Vida – CADIS

Bosques De Bohemia 2 No. 9,  
Bosques del Lago. Cuautitlan  
Izcalli, Estado de Méxi-co,  
México.  
C.P. 54766

[www.centroacv.mx](http://www.centroacv.mx)

LCA Study: Life Cycle  
Assessment (LCA)  
methodology of steel wire  
rod manufactured from steel  
scrap.

LCA Authors: García René  
and González Mireya.

Contact person:  
Juan Pablo Chargoy  
[jpchargoy@centroacv.mx](mailto:jpchargoy@centroacv.mx)

EPD International AB

Box 210 60, SE-100 31,  
Stockholm, Sweden.  
[www.environdec.com](http://www.environdec.com)

[info@environdec.com](mailto:info@environdec.com)

EPD registered through the  
fully aligned regional pro-  
gramme/hub:



EPD Latin America  
[www.epd-latinamerica.com](http://www.epd-latinamerica.com)

Chile:  
Alonso de Ercilla 2996,  
Ñuñoa, Santiago Chile.

México:  
Av. Convento de Actopan 24  
Int. 7A, Colonia Jardines de  
Santa Mónica, Tlalnepantla  
de Baz, Estado de México,  
México, C.P. 54050

# 13. REFERENCES

ALACERO. (2022). Asociación Latinoamericana del Acero (ALACERO) El acero es el único material que puede ser reciclado ilimitadamente al 100%. Retrieved from <https://www.alacero.org/noticias/el-acero-es-el-unico-material-que-puede-ser-reciclado-ilimitada-mente-al-100>

BIEE. (2023). Base de Indicadores de Eficiencia Energética de México. Retrieved from <https://www.biee-conuee.net/site/index.php>

CANACERO. (2021). Cámara Nacional de la Industria del Hierro y del Acero (CANACERO). Retrieved from Radiografía de la industria del acero en México 2021: [https://www.canacero.org.mx/aceroenmexico/descargas/Radiografia\\_de\\_la\\_Industria\\_del\\_Acero\\_en\\_Mexi-co\\_2021.pdf](https://www.canacero.org.mx/aceroenmexico/descargas/Radiografia_de_la_Industria_del_Acero_en_Mexi-co_2021.pdf)

Concretos Recicladados. (2021). Concretos Recicladados Sitio Web. Retrieved from <http://www.concretosrecicladados.com.mx>

DEACERO. (2024). Information provided by the technical team. Personal communication and internal report.

ECODES. (2010). ECODES. Retrieved from <https://archivo.ecodes.org/web/noticias/para-que-sirve-reciclar-acero-y-como-hacerlo>

Ecoinvent 3.9.1 (2023). Base de datos. General Programme Instructions of the International EPD® System. Version 4.0.

Goedkoop, M., Oele, M., Schryver, A., & Vieira, M. (2008). SimaPro Database Manual.

IMNC. (2008). NMX-SAA-14040-IMNC Gestión ambiental - Análisis de ciclo de vida - Principios y marco de referencia. México, D.F.: IMNC.

IMNC. (2008). NMX-SAA-14044-IMNC. Mexico D.F.: Instituto mexicano de normalización y certificación, A.C.

INEGI. (2010). Banco de Información Económica. Retrieved junio 14, 2012, from Series que ya no se actualizan > Sector manufacturero > Encuesta industrial mensual ampliada (SCIAN 2002) > Volumen y valor de producción por clase de actividad y producto > 326 Industria del plástico y del hule > 3261 Fabricación de productos de plástico: <http://www.inegi.org.mx/sistemas/bie/>

International Organization for Standardization. (2022). ISO 14020: Environmental statements and programmes for products – Principles and general requirements.

International Organization for Standardization. (2006). ISO 14025: Environmental labels and declarations – Type III environmental declarations – Principles and procedures.

MIRKEM. (2009). MIRKEM. Production Technology. Retrieved July 6, 2012, from Production process: [http://www.mirkem.si/ENG/production\\_technology.php](http://www.mirkem.si/ENG/production_technology.php)

EN 15804:2012+A2:2019/AC:2021 (Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.

PCR 2019:14 Construction Products V 1.3.4. (2024-04-30). EPD System. Retrieved from <https://www.environdec.com/>

Pontificia Universidad Javeriana, Facultad de Ingeniería. (2014). ANÁLISIS TÉCNICO Y ECONOMICO PARA EL USO DE ALTERNATIVAS DE DEMOLICIÓN EN EL EDIFICIO No. 19 JOSÉ CELESTINO ANDRADE DE LA PUJ. Bogotá, Colombia: Maya Rojas, O.

PRé Consultants. (2010). Database manual. Methods library. Retrieved abril 20, 2010, from <http://www.pre.nl/download/manuals/DatabaseManualMethods.pdf>

Rajshree. (2011). Paper company. Retrieved agosto 3, 2012, from Process in making paper cups.: <http://www.paper-cup.in/paper-cup-manufacturing-process/>

SEMARNAT. (2020). Diagnostico Básico para la Gestión Integral de Residuos. México.

UN Comtrade. (2012). United Nations Commodity Trade Statistics Database . Retrieved julio 12, 2012, from <http://comtrade.un.org/db/dqBasicQueryResults.aspx?px=HS&c-c=390311&r=842&p=484&rg=2&y=2011,2010,2009,2008,2007&so=8>

UNESID. (2021). Unión de Empresas Siderúrgicas . Retrieved from <https://unesid.org/cifras-clave/>